


### Model ISB-801J Controller

The i-Lax 801 controller is ruggedly designed to give security professionals facilitates complete control over video matrix and up to 256 speed domes. It comes with a logical and ergonomic keypad and LCD display, 3 axis proportional joystick for pinpoint control, multi protocol support RS-485 communication support and password control.



Model		ISB-801J
Available power Selection		
Power Consumption		900mA
Camera Input		Composite 1Vp-p;75Ω
Communication Distance		1200 meters
Lens Control	Zoom	Tele/Wide
	Focus	Near/Far/Auto Focus
	Iris	Open/Close/Reset
Pan/Tilt Control	Manual	Variable speed control option
	Auto pan	On/Off
Camera Control	Position select	999 points
	Home Position	Available
	Camera Setup	Available
Operating Temperature		-10 ~ +55
Joystick		3D
Protocol		Multi-Protocol Supported
Weight		1.5kg
Dimensions		370x170x110mm

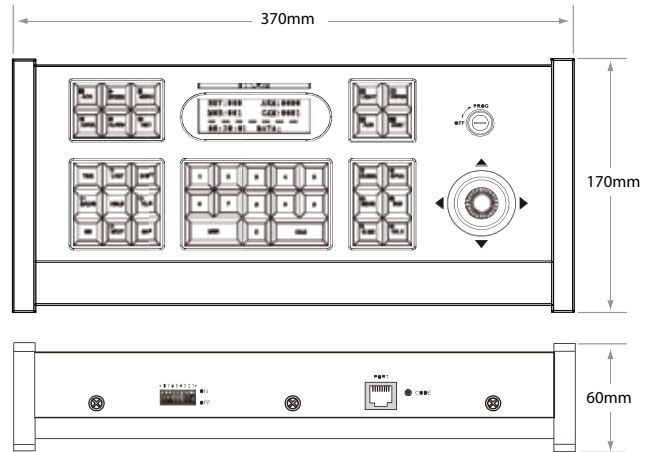