



i-LAX ELECTRONICS INC.

DA Series H.264 Standalone DVR

4 Channel Duplex (Full Triplex w/network viewing)

The DA Series is a 4 channel high performance DVR that provides simultaneous recording and playback, along with real-time display, 120/100 fps recording, full & split screen, Quad and 3 PiPs. The DA comes with two hard drive capacity, S-video, CVBS monitor and VGA optional output.



IPD-4DA 4 Channel

Resolution: 720 x 480 (NTSC) 720 x 576 (PAL)

Compression: H.264

Video inputs: 4 Channel

Record speed: up to 120 fps (NTSC), 100 fps (PAL)

Audio In/Out: 2 x RCA - 1 Channel in & out

Alarm Inputs: NC Type



REGULATORY:

CE (EN5513, EN50130-4)




EU: 73/23/EEC LVD

RoHS Compliant

ACCESSORIES:

Spare Remote Control

Spare USB Mouse

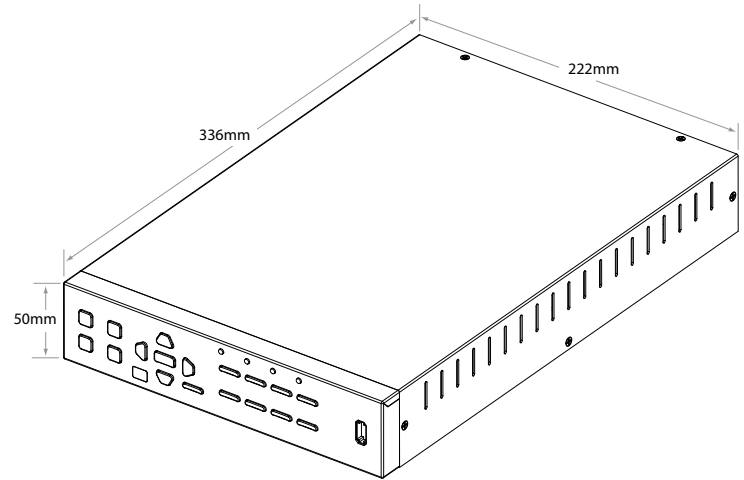

ORDERING:

IPD-4DA H.264 Four Channel Digital Video Recorder (DVR)

NOTE: Specify power requirements when ordering: 120vAC 60Hz or 230vAC 50hz.

Model	IPD-4DA
Video Signal	
Television System	NTSC/PAL
Refresh Rate	NTSC:60 fields/sec / PAL:50 fields/sec
Resolution	NTSC:720x480 ; PAL:720x576
Inputs	4Ch
Inputs Signal	Composite 1.0Vp-p 75ohms
Outputs Signal	Main monitor, VGA, Composite 1.0Vp-p 75ohms
Video Features	
Live (fps)	NTSC:120/PAL:100
Zoom	Digital 2X zoom
Sequence	Sequence display in full size
Display Format	Full screen, Quad split
Audio Features	
Audio In/Out	4Ch input/1Ch output
Compression	G.711
Record	
Recording Speed (IPS)	NTSC:120/PAL:100
Resolution	NTSC: 720x480, 720x240,360x240 PAL:720x576, 720x288,360x288
Compression	H.264
Recording	Motion, Alarm, schedule
Search	
Rec. Search Selection	By Manual, Timer, Motion alarm, Each camera, All cameras
Playback Option	Fast x32,Slow forward, Rewind, Image by image
Backup	
Backup Media	HDD, USB Stick Memory, Network
Backup Option	All cameras, Time range
Network	
Ethernet	Auto sense 10/100mpbs
Protocol	TCP/IP,DHCP,DDNS server
Alarm	
Alarm Inputs	4 Inputs
Alarm Outputs	1 Replay outputs (3A max)
Alarm Latch Up	1~999 sec
Buzzer Out	On/Off
Connectors	
Video Inputs	4 BNC
Monitor Out	1 BNC
Alarm In/Out	D-sub
Ethernet	RJ45
Mouse	PS2/USB
Mechanical	
USB	USB 2.0
Environmental	
Operating Temperature	-5°C ~ 40°C (23°F - 104°F)
Operating Humidity	5% - 95%

DA Series H.264 Stand-alone DVR

4 Channel Duplex (Full Triplex w/network viewing)

REGULATORY:

CE (EN55113, EN50130-4)
EU: 73/23/EEC LVD
RoHS Compliant

ACCESSORIES:

Spare Remote Control
Spare USB Mouse

